

FLEXIBLE DUCTS VENTIFLEX VTX-DN 75

CONSTRUCTION TECHNIQUE

Flexible PE ducts for construction technologies



Technical data

The VENTIFLEX® ducts are designed to construct mechanical ventilation systems i.e. manifold ventilation. Due to the enlarged internal diameter, it's possible to let noiseless over the complete range of airflow 40 m³/h.

They can also be used to distribute cool air from the ground heat exchanger and warm heating air e.g. from the fireplace heating - through the special heating system.

Owing to small diameters, the ducts can be totally hidden in the floor under the screed, under plasters in the framing construction or in the wall grooves. Because of the high circumferential stiffness, they can be placed in the ceiling being poured e.g. Filigran ceiling.

Dimensions

Outside diameter	77 mm
Inside diameter	67 mm
Minimum bend radius	1 D

Resistance to external pressure

Resistance to external pressure 137,2 N
 Pt. 5.6 Norm PN-EN 17192

Type of duct

Composite, double layer pipe

Material

High quality PE polyethylene (without recycling) . Bactericidal and anti-static inner layer with large micro-silver with PZH approval: HK-K-0722-01-2017

Pollution

Only new highest quality materials are used, without milling and recycling. PE is classified as a safe substance because of health and toxicologically harmless in accordance with Directive 1999/45 / WE.

Operating temperatures

Min. - 20°C / Max. 70°C
 Pt. 5.4 Norm PN-EN 17192

Duct length

50 m elastic ring materials
 The ends of the ducts are sealed with plugs to prevent contamination

Color

Outer tube: blue
 Inner tube: white

Storage

In the case of a product packed in black bags (UV stabilized)
 - outdoor storage up to 12 months.

National technical specification

7a. Polish Product Norm: PN-EN 17192:2019-01


Airtightness
 Reaction to fire
 Microbiological activity
 Flow resistance

Class: ATC 3
 Pt. 5.2 Norm PN-EN 17192

Class: E
 Pt. 5.5 Norm PN-EN 17192, PN-EN 13501-1

The sample shows antibacterial activity against the used standard bacterial strains
 Escherichia coli R=2,09; Staphylococcus aureus R=4,57
 Pt. 5.8 Norm PN-EN 17192

5 Pa/mb over the range of airflow 40 m³/h
 Pt. 5.3 Norm PN-EN 17192

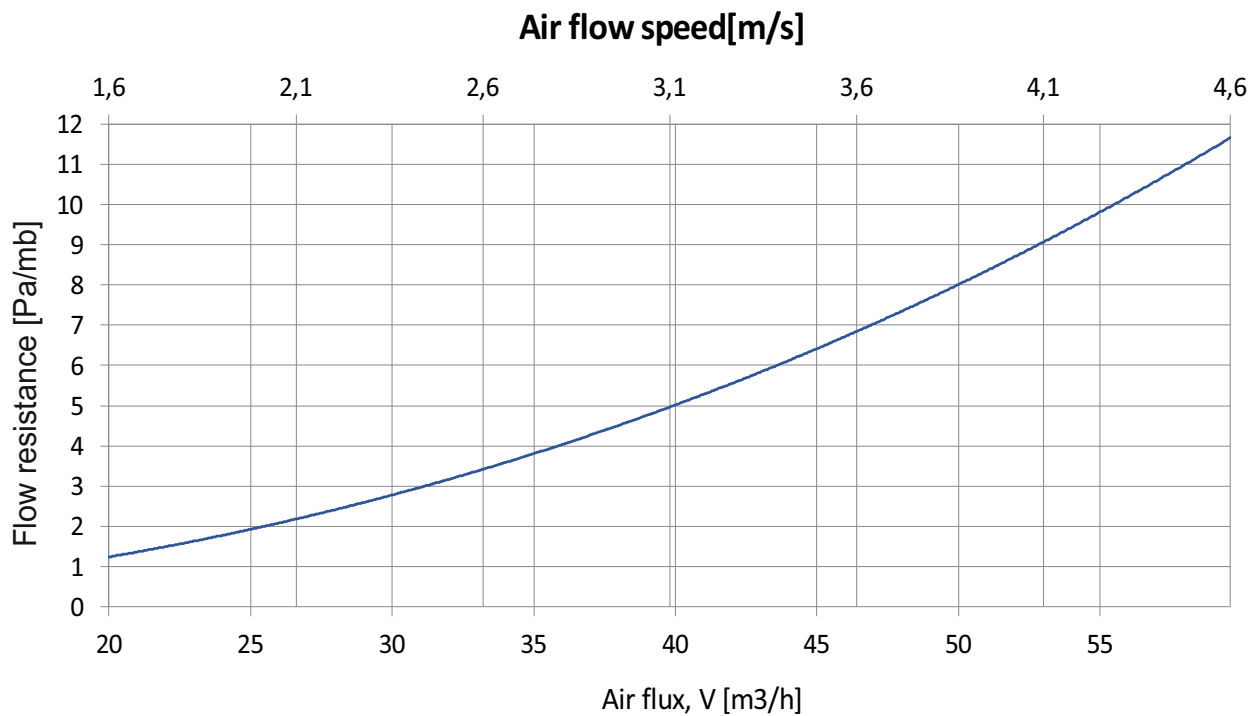

Ground-Therm Sp. z o.o.
 ul. Podmiejska 35
 41-940 Piekary Śląskie
 tel. +48 32 231 80 20
 biuro@ground-therm.com